


10X HD Intelligent Network High Speed PTZ Dome Camera

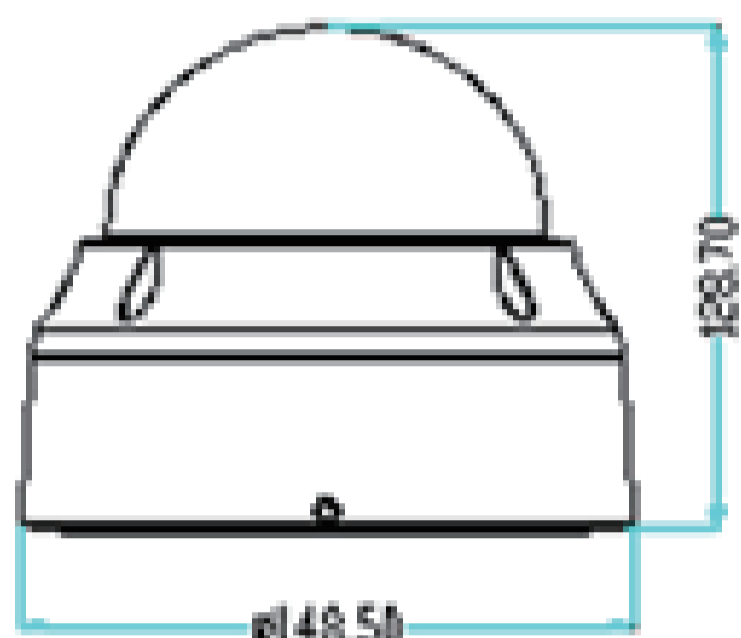

● FEATURES :

- 2MP HD outdoor intelligent network high speed dome camera
With quickly installation structure
- H.264
- Full HD 1080P, 10X optical zoom, F=4.9~49mm
- Manual control speed: 0.1-200°/S, preset speed: 240° / S
- Horizontal continuous rotate 360°, 90° vertically auto rotation
- Privacy zones, Alarm function, Hard add
- 256 preset, 4 pattern, 4 cruise
- Lightning-proof, IP66, DC12V/ DC24V±10%/POE

● SPECIFICATION :

Model	FX-P6210D
Pick-up device	1/2.8", 2.0Mega CMOS Sensor
Effective Pixels	2MP
Video Output	Main stream: 1080p\960p\720p Sub stream: 720x576P\640x480\352x240
Min. Illumination	0.5 LUX (F1.6, ICR ON)
Scanning system	Progressive scan
Sync System	Internal
S/N Ratio	50dB
White Balance	AUTO/ ATW / INDOOR / OUTDOOR / ONE-CLICK/ Manual
Day&Night	Auto, COLOR, B/W(ICR)
Electronic shutter	Auto / Manual/ Anti-flicke
AGC	Auto/Manual
RTCP	SONY VISCA(TTL), Baud rate: 9.6 kb/s, 19.2 kb/s, 38.4 kb/s
BLC	OFF/ BLC/ HLC
Mirror	OFF/ H-Mirror/ V-Mirror/ rotation
Defog	Support (ON/ OFF)
2DNR	High/ Middle/ Low/ OFF
LENS	
Zoom	10X optical zoom
Focal Length	f=4.9mm~49mm F1.6(W)~F2.8(T)
Focus	Auto (sensitivity: normal/ low)/Manual/One push
Iris	Auto / Manual
FUNCTION	
Network Protocols	HTTP,SMTP,UPnP,DNS,DDNS,NTP,RTSP,RTP,TCP,DHCP,PPPoE
Record Mode	Dual-stream
Network Interface	RJ45 ,support 10M/100M network adaptive
API	Support software integration open type API , Standard Protocol (Onvif) ,The third party management platform access
Web Browser	Support IE7, IE8, IE9, IE10 and based on the IE core browsers
Smart phone	Support Apple/ android system mobile phone to supervise
Horizontal	360° Endless
Vertical	0°~90° Auto rotation
Rotation Speed	Preset: 240°/sec, Manual: 0.1~200°/sec
Preset Accuracy	0.1°
Soft/Hard add	Support
Address	1-255
Preset	256 Preset
Swing	1
Pattern	4
Cruise	4
Horizontal	Support
Power up action	Preset/ pattem/ cruise/ continuous scan
Home Function	Preset/ pattem/ cruise/ continuous scan
Control interface	RS-485
Protocol	Auto identify
Bit rate	Auto identify
Alam	2 CH input, 1CH output
Alarm linkage	Preset/ pattem/ cruise/ continuous scan
Audio	1CH input, 1CH output
OSD Menu	Chinese/English
ENVIRONMENT	
Power supply	DC24V±10%/POE
Power	15W
Operating Temp	-30°C~60°C
Humidity	0%~90%
Size	128.7(H)*148.5(D)mm
Application environment	Outdoor
Water proof	IP66
Water proof	1.5KG