


2 Megapixels Network IR Vandalproof Dome Camera



FX-WP530IRV

Dimensions:

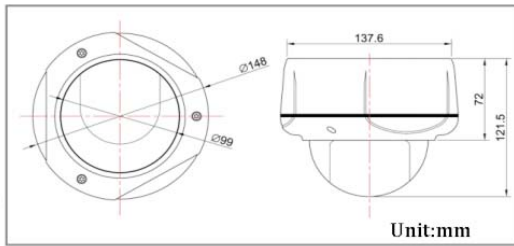

• Key Features:

- 1/3" Progressive Scan Low Light CMOS
- Use 3D smart noise reduction function
- Built-in 30 pcs of LED
- Three-axis adjustable, no dead angle surveillance
- H.264/MJPEG is optional, dual streaming, low bandwidth, and high quality.
- Support motion detection, network fault detection alarm recording, image snapping
- Support 5 area privacy mask
- Built-in Web Server, Support IE video browsing, Parameter configuration, upgrade, user rights management
- Power supply DC12V/1A
- Support POE power supply
- Vandalproof Level: IK10 rate
- Waterproof level : IP66
- 2.8-12mm Auto Iris Varifocal Lens



Technical Specifications :

Model	FX-WP530IRV
Processor	Davinci TI processor, 2 processors, ARM9 and DSP;
Sensor	1/3" Progressive Scan CMOS, Sony
Shutter time	1/5 Sec to 1/50,000 Sec
Lens	2.8-12mm Auto Iris varifocal Lens
IR Range	30M
D/N Model	IR-Cut Auto
Video Compression	H.264/MJPEG
H.264 compression type	H.264 Baseline/H.264 Main Profile/H.264 High Profile
Video Bitrate	main streaming: 500Kbps~12Mbps second streaming : 100Kbps~6Mbps
Audio Compression	G.711a/G.711u/RAW_PCM optional
Audio Bit Rate	G.711a(8kbps)/G.711u(8kbps)/RAW_PCM(16kbps)
Streaming	Dual Streaming
Frame Rate	Master Streaming : 50Hz: 25fps (1920 × 1080); 60Hz: 30fps (1920 × 1080) Sub Stream : 50Hz: 25fps (640 × 360); 60Hz: 30fps (640 × 360)
Alarm Trigger	Motion Detection Alarm, Privacy Mask Alarm, Storage full Alarm, Storage error
Network protocol	IPv4/IPv6, RTSP/RTP/RTCP, TCP/UDP, HTTP, DHCP, DNS, FTP, DDNS, PPPOE, SMTP
General Function	Instant Recovery, Anti flicker, dual streaming, password protection, video masking
Audio Input	1 Ch, MIC IN/Line IN, 3.5mm Audio terminal
Audio output	1 Ch, 3.5mm audio port (linear level, impedance: 600Ω)
Communication	1 RS-485
Alarm input	1 Ch
Alarm output	1 Ch
Alarm	1 In/1 Out
Video output	1Vp-p Composite Output (75Ω/BNC)
Network connection	1 RJ45 10M/100M
Operating Humidity	-30°C ~ 60°C, Humidity <95%(No Condensation)
Power connection	DC12V±10% / PoE (is optional)
Power Consumption	6W
Waterproof Level	IP66

Software platform compatible